




SHARED-USE PATH PLAN

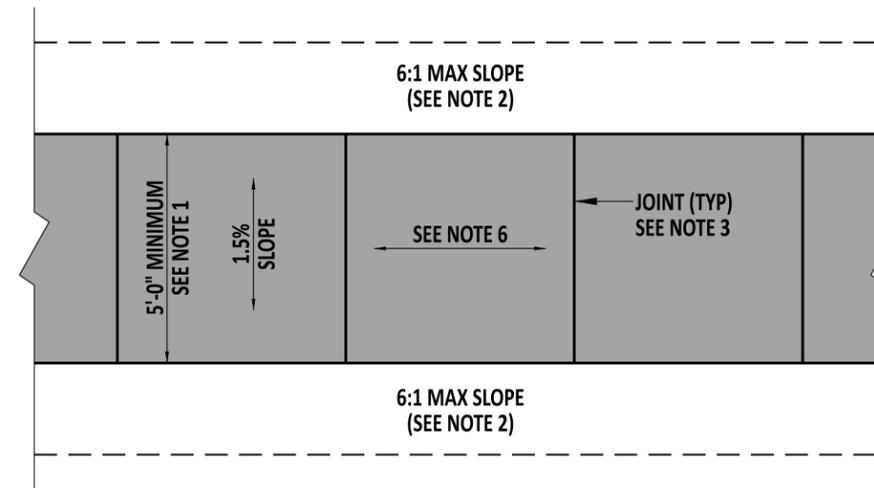

SIDEWALK PLAN

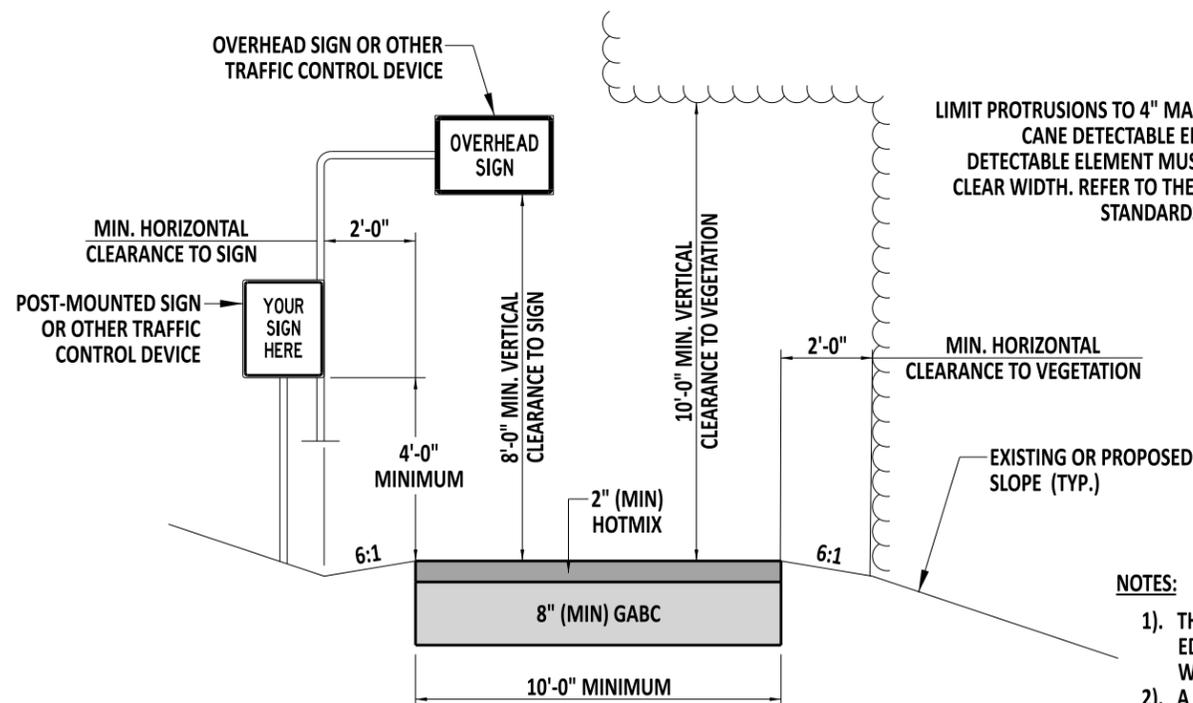

SHARED-USE PATH TYPICAL SECTION

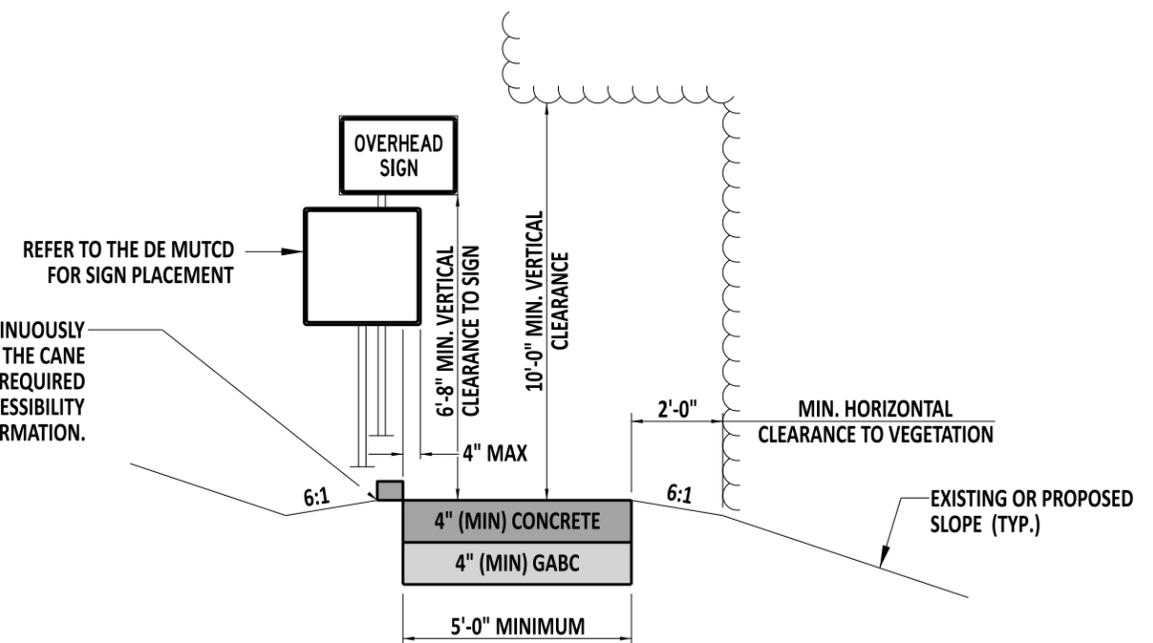

SIDEWALK TYPICAL SECTION

NOTES:

- 1). THE MINIMUM SIDEWALK WIDTH WHEN A BUFFER STRIP IS PROVIDED BETWEEN THE EDGE OF PAVEMENT AND THE SIDEWALK IS 5'-0". THE MINIMUM SIDEWALK WIDTH WHEN A BUFFER STRIP IS NOT PROVIDED IS 6'-0".
- 2). A 6:1 GRADE IS REQUIRED FOR A MINIMUM OF 2'-0" IMMEDIATELY ADJACENT TO THE SHARED USE PATH OR SIDEWALK.
- 3). FOR SIDEWALKS, PLACE CONSTRUCTION JOINTS EVERY 5'-0" IN ACCORDANCE WITH SECTION 705.3. FOR CONCRETE SHARED-USE PATHS, PLACE CONSTRUCTION JOINTS EVERY 10'-0".
- 4). PLACE EXPANSION MATERIAL IN ACCORDANCE WITH SECTION 701.3.
- 5). WHEN EXISTING OBSTRUCTIONS (FIRE HYDRANT, UTILITY POLE, ETC...) ARE LOCATED IN THE SIDEWALK, MAINTAIN A MINIMUM WIDTH OF 32" AND MAXIMUM LENGTH CONSTRICTION OF 24".
- 6). NOT TO EXCEED 4.5% OR ADJACENT ROAD GRADE.
- 7). PROVIDE A STANDARD 3'-0" BUFFER WIDTH BETWEEN SIDEWALK AND BACK OF CURB.
- 8). FOR TRANSITIONS TO STANDARD BUFFER WIDTH, MAINTAIN FULL WIDTH CONCRETE UNTIL THE SIDEWALK BUFFER STRIP IS A MINIMUM WIDTH OF 18".
- 9). THE MINIMUM BUFFER WIDTH FOR A SHARED USE PATH IS 5'-0", WITH A PREFERRED WIDTH OF 10'-0".



Andrew Shott
ENGINEERING SUPPORT
RECOMMENDED
12/13/2022
DATE

SHARED-USE PATH & SIDEWALK
STANDARD NO. M-3 (2022)
SHT. 1 OF 1

REVIEWED
DEPUTY DIRECTOR - DESIGN
12/16/2022
DATE
APPROVED
CHIEF ENGINEER
12/21/2022
DATE